

C20, LY5 & G10 Sleeves

Safety Lighting



Specification

- Standards BS5454 1989
CE, WEEE and ROHS compliant



T5 TUBE
Ø20mm

T8 TUBE
Ø33mm



C20, LY5 & G10 Sleeves

T5

PART NR & C20, LY5 AND G10

T5 8w
T5 14w
T5 21w
T5 28w
T5 35w


T8

PART NR & C20, LY5 AND G10

T8 15w
T8 18w
T8 30w
T8 36w
T8 58w
T8 70w


C20 - Clear

The EncapSulite C20 sleeve is safe up to 400 nanometers and is designed for use in museums, archives and galleries, where constant exposure to unprotected fluorescent lighting will damage items on display. T5 and T8. Conforms to BS 5454.

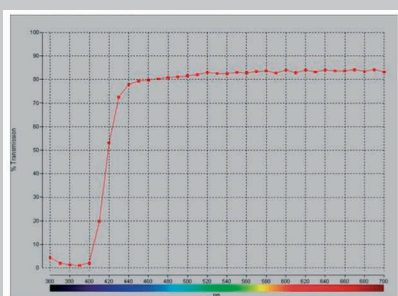



LY5 - Light yellow

The EncapSulite LY5 sleeve contains a specially coated light yellow ultra violet absorbing filter, safe up to 470 nanometers. Designed for higher UV-sensitive materials and locations but giving utmost brightness.

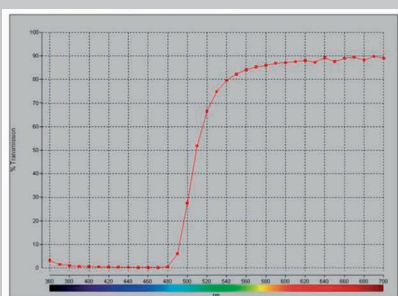

G10 - Gold

Safe up to 520 nanometers and designed for locations such as clean rooms, plate making, circuit board and semiconductor manufacturing plants.

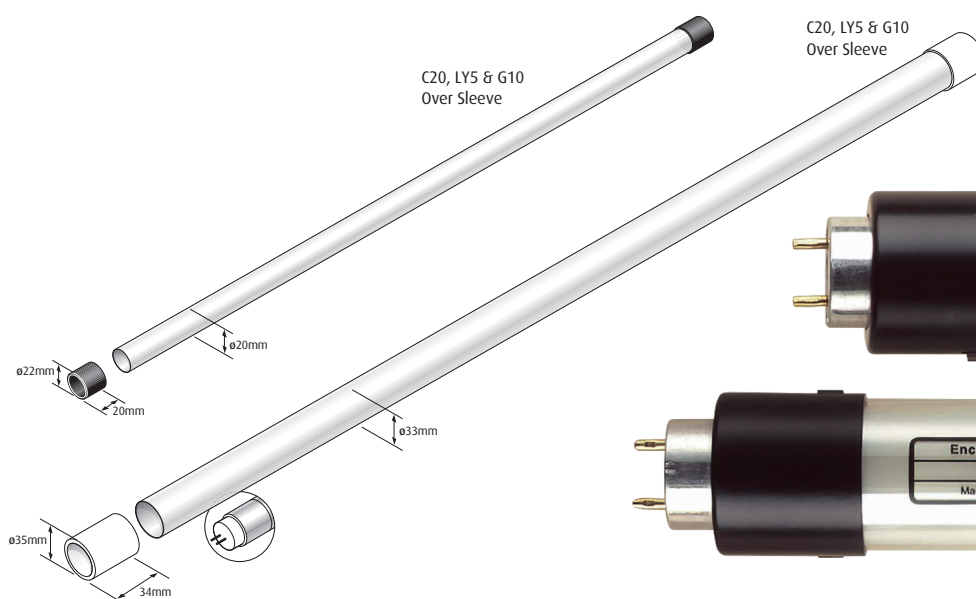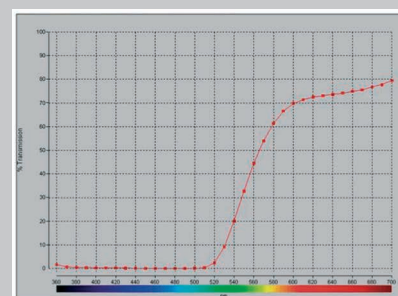

For further information or options, call to us on 01525 376974,
email reply@encapsulite.co.uk or visit www.encapsulite.co.uk