


Pre-gripper with rapid adjustment

The pre-gripper takes the sheet from rest position on the lay board and accelerates it to circumferential speed of the impression cylinder. During the transfer from the pre-gripper to the cylinder both travel at identical speed so that perfect positive register is guaranteed.

The setting of the pre-gripper to different thicknesses of stock is from a central position to a calibrated adjustment screw. The gripper bar is positively set to parallel position. Setting errors, such as setting at an angle, are eliminated.

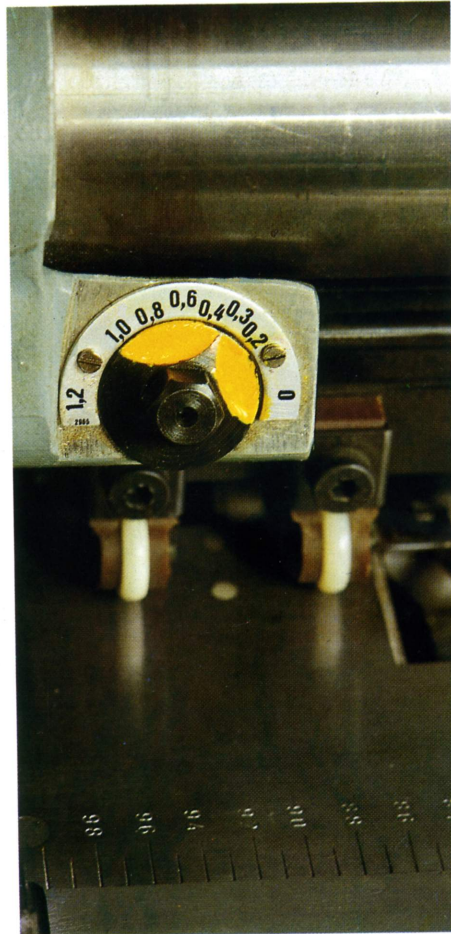

Only one setting screw is turned to adjust to change of thickness of the stock

Height adjustment
of gripper contact
bar by wedge
displacement

